

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 230 883 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.08.2002 Bulletin 2002/33

(51) Int Cl.7: **A47J 43/07, A47J 43/06,
A47J 43/08**

(21) Application number: **01500260.3**

(22) Date of filing: **30.10.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Cacho Corral, Miguel Angel**
20100 Renteria, Guipuzcoa (ES)
• **Hidalgo Garcia, Javier**
20700 Tolosa, Guipuzcoa (ES)

(30) Priority: **05.12.2000 ES 200002996**


(74) Representative: **Riera Blanco, Juan Carlos**
Doctor Fleming 24, 1o A
28036 Madrid (ES)

(71) Applicant: **Sammic, S.A.**
20730 Azpeitia, Guipuzcoa (ES)

(54) **Improved food mixing and grinding machine**

(57) Improved machine for grinding and beating food products, consisting of a motive body made up of an external casing that has the motor inside complete with support and ergonomic handle and incorporating a

bell (4) that has a coil to join it to a blender (5) or a beater (6), with operation switches on the handle (3) and an electronic circuit (13) inside the casing to control the machine.

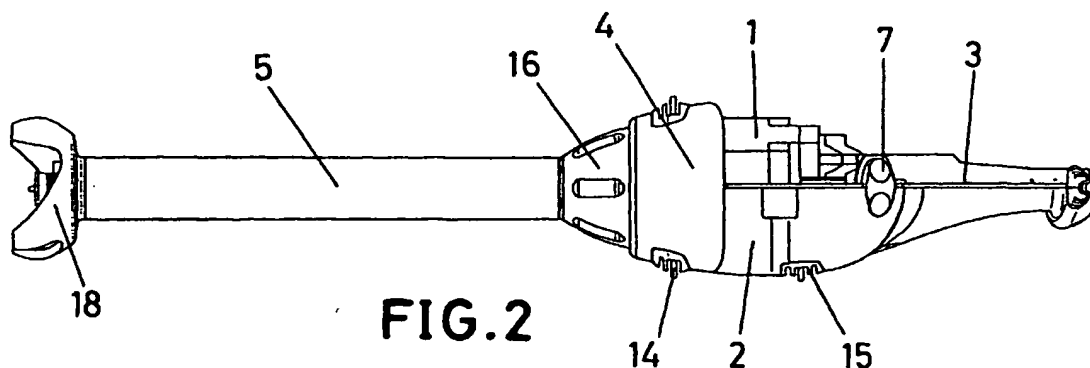

Description

OBJECT OF THE INVENTION

[0001] The specification herein refers to a Utility Model application, relating to an improved food mixing and grinding machine, whose main purpose lies in its configuration as a portable electric apparatus, comprising of a motor unit, to which either a grinding rod or a mixing rod for preparing foods can be attached, substituting one rod for another in a totally simplified way.

FIELD OF THE INVENTION

[0002] This invention is relevant within the industry dedicated to the manufacturing of home electrical appliances and, in particular, appliances for the preparation of food products.

BACKGROUND OF THE INVENTION

[0003] On the part of the applicant, it is known that a number of manually operated apparatus exists, i.e. handheld by the user and connected to the electricity supply, which come in the form of a motor unit to which a rod with specific operating characteristics is attached.

[0004] The applicant is aware of the existence of this type of machine commonly known as a mixer, which has the motor unit and the rod fixed together and non-detachable, and also motor units to which the rod, with the appropriate blade to be used, is simply connected.

[0005] However, the applicant does not know of the existence at present of a food mixing and grinding machine which has different rods for use, by means of which all types of culinary operations, which require their use, can be carried out, without using auxiliary material, such as may be recipients with blades, complementary units to the rods, double blades, etc.

SPECIFICATION OF THE INVENTION

[0006] The improved food mixing and grinding machine which the invention proposes, is in itself an evidently new development within the specific field of application, combining a number of application possibilities, using only and exclusively two rods meant for various uses.

[0007] More specifically, the improved food mixing and grinding machine consists of a motor unit, comprising an external casing consisting of two parts meant to protect and, with the help of the motor, support what is referred to as the universal motor, which is fitted in its interior.

[0008] The casing has an ergonomic handle to achieve a better grip of the apparatus, and a bell-shaped part is connected to the handle by means of using conventional screws, this part has a thread for a screw by which the motor unit is connected to the grinding or mix-

ing rod.

[0009] On the outer part of the apparatus handle, the appropriate buttons to activate the machine are located, and it has a motor axle which, on its lower end has a motor coupling sleeve, by means of which it is connected to a grinding rod, transmitting the power to either a blade which grinds the food to be prepared or to a mixing hoop unit, by which means the food is transformed into mixtures, shakes and creams.

[0010] The motor coupling sleeve is connected to the motor axle by means of a pin, being incorporated in the inside of the casing of the aforementioned characteristics an electronic circuit for controlling the machine's functions.

[0011] The invention has the means for refrigeration in the form of a motor ventilator, which draws in the air through the upper grille of the casing, driving the air by means of the rotor, at the same time cooling and driving it out through the lower grille of the casing, it being important to point out that the grilles are detachable.

[0012] With regard to the rod when used in grinding mode, it must be pointed out that it has a nut for connecting to the arm, and for maximum resistance a metallic insertion has been added which possesses a thread for screwing to the motor unit, forming a block, both the nut and the turbine protector, with the rod.

[0013] With regard to the power transmission, it is transmitted by the motor to the male coupling sleeve through the motor coupling sleeve, transmitting the power to the axle of the rod which is connected to the male coupling sleeve by means of a pin.

[0014] The axle of the rod is made up of a turbine axle, upper turbine axle and lower turbine axle, which are connected by means of pins, being screwed to the blade support on the lower part of the rod's axle, to which the blade is riveted and when the rod's axle rotates the blade will rotate, mixing the food, the rod's axle being supported on two bearings to improve rotation.

[0015] To facilitate the assembly and dismantling of all the interior mechanisms of the rod, a block unit of the same has been made, the upper bearing being supported on the block of the bearing/stop and the lower bearing on the lower closing device of the turbine, in a way which if the blade of the mixing rod, which is screwed to the lower axle of the turbine, is removed, and the lower closing device of the turbine protector is unscrewed, all interior parts of the mixing rod can be removed.

[0016] To ensure that the inside of the grinding arm is watertight, it has a V-ring unit, which together with washers, a stop and a cylindrical joint, as well as a blade support having a mechanised screw thread, generate or impede liquids being able to enter into the interior of the grinding arm, thus, as it is watertight, it can be unscrewed from the motor unit for cleaning when necessary, and can also be cleaned in a dishwasher.

[0017] The mixer consists of a secondary transmission coupling nut, which has a thread to allow the mixer to be joined to the motor unit, presenting a secondary

transmission casing made up of two parts which contain the complete transmission mechanisms and two stirring hoops which are detachable.

[0018] The transmission is quite similar to the mechanism incorporated in the grinding rod, in the fact that the motor transmits power to the male coupling sleeve through the motor coupling sleeve.

[0019] The motor coupling sleeve then transmits the movement to the secondary transmission axle, to which it is connected by means of a pin, and the latter, by means of cogs, transmits the movement to the axles of the stirring pieces.

[0020] It should be highlighted that as the stirring hoops are connected to the axles of the stirrers, they will rotate and therefore convert the food into mixtures, shakes and creams.

[0021] The secondary transmission axle rotates supported by bearings and the axles of the stirrers by sintered bushes.

[0022] To ensure that the interior of the mixer is watertight, it possesses a set of stops, washers, V-ring and cylindrical joints which also means that as the mixer is watertight it can be unscrewed from the motor unit for cleaning, even in the dishwasher.

[0023] The connection between the stirring hoops and the stirring axles is made through a "positioner" which contains a spring and ball, and when the stirring hoops are introduced into the stirring axles, the ball is introduced into the groove of the stirring axle, therefore for the stirring hoops to be separated it is necessary to use traction.

[0024] With regard to the stirring hoop it must be pointed out that it consists of two rods of hoops, which are connected on the lower part by a hoop rivet and on the upper part with the outer covering or cap, rod covering and rod cap, and as they are detachable, the stirring axles can be cleaned even in dishwashers.

DESCRIPTION OF THE DRAWINGS

[0025] To enhance the description being given and with the aim of offering a greater understanding of the characteristics of the invention, and as an integral part of the specification, it is accompanied by a set of plans, being illustrative and non-restrictive, in which the following is represented:

[0026] Figure number 1 - Corresponds to a side-view of the object of the invention, relating to an improved food mixing and grinding machine, with a grinding rod incorporated.

[0027] Figure number 2 - Shows another side-view of the object represented in Figure number 1, highlighting the area not seen in the graphic representation of Figure number 1.

[0028] Figure number 3 - Corresponds to a plan view of the lower area of the object represented in Figures 1 and 2.

[0029] Figure number 4 - Shows a view from A-B of

the object represented in Figure 3.

[0030] Figure number 5 - Corresponds to a view of the grinding rod.

[0031] Figure number 6 - Represents a view from C-D of the object shown in figure number 5.

[0032] Figure number 7 - Corresponds to a section view of the sub-unit of the secondary transmission.

[0033] Figure number 8 - Represents a view from I-J of the object shown in Figure number 7.

[0034] Figure number 9 - Represents a view from E-F of the object shown in Figure number 10.

[0035] Figure number 10 - Corresponds to a view of the mixing rod.

[0036] Figure number 11 - Represents a plan view of the partially sectioned grinding blade.

[0037] Figure number 12 - Shows a view of the object represented in Figure number 11 seen from the opposite side.

PREFERRED EMBODIMENT OF THE INVENTION

[0038] In the light of these Figures, one can observe how the improved food mixing and grinding machine consists of a motor unit, made up of an outer casing consisting of two parts (1) and (2) which protect and hold together the universal motor fitted in its interior.

[0039] The casing has an ergonomically styled handle (3) to allow a better grasp of the apparatus.

[0040] To the casing made up of two parts (1) and (2) in the area of the handle (3) a bell-shaped part (4) is attached which has a thread for a screw to connect with the grinding rod or the mixer, numbered (5) and (6) respectively.

[0041] On the outer part of the handle (3) the buttons (7) for activating the machine for grinding and mixing are located, the motor axle having a sleeve (6) for connection to the grinding rod (5), through which it either transmits the power to a blade (11) which has the function of grinding the food or to a mixing hoop unit (6), with which mixtures, shakes and creams are made.

[0042] The motor coupling sleeve (8) is joined to the motor axle by means of a pin (12), where it must be highlighted that an electronic circuit (13) which controls the workings of the apparatus is incorporated in the interior of the casing.

[0043] The invention also has means for refrigeration consisting of a motor ventilator which draws in air through the upper grille (14) of the casing made up of parts (1) and (2), and by means of the rotor cooling it and driving it through the lower ventilation grille (15) of the aforementioned casing, it being important to point out that the grilles (14) and (15) are detachable, to ensure that the invention complies with hygiene standards.

[0044] With regard to the grinding rod (5) it must be taken into account that it has a coupling nut (16) to which a metallic insertion (17) has been added having the appropriate thread for screwing to the motor unit, both the nut (17) and the turbine protector (18), forming a block

with the rod (5).

[0045] With regard to power transmission, the motor transmits to the male coupling sleeve (19) through the motor coupling sleeve (8), transmitting the power to the axle (20) and thus, in turn to the parts (19) and (21), which are in turn joined by pins.

[0046] On the lower part of the rod axle (20), the blade support (22) is located, to which the blade is riveted (11), and when the rod axle (20) is rotated, it is supported between two bearings (23 and (23')).

[0047] To facilitate the assembly and dismantling of all the interior mechanisms of the rod (5), a block containing all its components has been made, in such a way that once the grinding rod is removed from the support unit, the blade (11) can be extracted.

[0048] To ensure that the interior of the grinding arm (5) is watertight, it has a V-ring unit (24), which together with washers, a stop and a cylindrical joint, as well as the blade support impede liquids from entering the interior of the grinding arm (5), and consequently as it is watertight, the grinding arm can be unscrewed from the motor unit for cleaning even in dishwashers.

[0049] The mixing arm (6) consists of a coupling nut (30) of the secondary transmission which has a thread, by which the mixer is screwed to the motor unit, also having a secondary transmission casing made up of two parts (31) and (32), these two parts being made suitable for containing all the transmission mechanisms, as well as two detachable stirring hoops (6).

[0050] Transmission is practically the same as with the grinding arm (5), in that the motor transmits the power to the male coupling sleeve by means of the motor coupling sleeve, at the same time transmitting to the secondary transmission axle, to which it is joined by a pin, and this in turn joined by means of cogs (33) and (34) to the stirring axles (35) and (35').

[0051] As the stirring blades (36) and (36') are joined to the stirring axles (35) and (35'), they rotate and therefore obtain the required mixtures, shakes or creams, highlighting that the secondary transmission axle (37) rotates supported by bearings (38) and the stirring axles (35) and (35') by sintered bushes (39) and (39').

[0052] To ensure that the interior of the mixer (6) is watertight, there are stops, washers, a V-ring and cylindrical joints which allow the mixing unit (6) to be unscrewed from the motor unit formed by parts (1) and (2) to enable the unit to be cleaned even in a dishwasher.

[0053] The connection between the stirring hoops and the stirring axles is made by means of a "positioner" (40) which has a spring and ball, and when the stirring hoops are introduced into the stirring axles, the ball is introduced into the groove located in the stirring axle, thus for the stirring hoops to be separated it is necessary to use traction.

[0054] By referring to Figures 9 and 10, one can observe that the mixer has hoops (41) and (41') connected to the lower part (42), the upper part having a bush (43), a sleeve (44) and a bush (45) where the central rod is

joined (6).

[0055] As in the aforementioned cases, the stirring axles are detachable.

Claims

1. Improved food mixing and grinding machine, of those which have a motor unit, to which a grinding arm or mixer can be attached for preparing foods, characterised because the motor unit consists of an external casing made up of parts (1) and (2), inside of which the motor is located with support, the casing made up of parts (1) and (2) having an ergonomically designed handle, on the lower part of the casing and connected by means of screws there is a bell-shaped piece (4) which has a thread incorporated to allow screwing to the grinding arm (5) or to the mixer (6), having activating buttons on the outer part of the handle (3), the motor axle having a motor coupling sleeve (8) on its lower end for connecting to the grinding arm (5), transmitting the power either to a blade, or to a mixing hoop assembly (6), the coupling sleeve being joined to the motor axle by means of a pin (12), with an electronic circuit (13) incorporated inside the casing to control the workings.
2. Improved food mixing and grinding machine, in accordance with the first claim, characterised by possessing means of refrigeration consisting of a motor ventilator which draws in air through the upper grille of the casing made up of parts (1) and (2), and drives the air by means of the rotor through the lower grille (15), both grilles (14) and (15) being detachable.
3. Improved food mixing and grinding machine, in accordance with the previous claims, characterised because the grinding rod (5) has a nut (16) for coupling to the arm, having a metallic insertion (17) for reinforcement which has a thread for screwing to the motor unit, the nut and the turbine protector (18) forming a block with the rod (5).
4. Improved food mixing and grinding machine, in accordance with the previous claims, characterised because the transmission of power is effected by means of the male coupling sleeve (19) through the motor coupling sleeve (8), which in turn transmits the power to the axle (20) of the rod (5), which is connected to the male coupling sleeve (19) by means of a pin, the axis (20) being made up of an upper turbine axle and a lower turbine axle, connected by pins, a blade support being screwed to the lower part of the axle (20) of the rod (5), the blade (11) being riveted in the support, and the rod axle (20) being supported by two bearings (23) and

(23').

5. Improved food mixing and grinding machine, characterised because the grinding arm is set up as a watertight compartment having a V-ring (24), washers, stop and cylindrical joint, with a blade support having a mechanised screw thread. 5

6. Improved food mixing and grinding machine, characterised because the mixer has a nut (30) for coupling to the secondary transmission, which has a thread for screwing together the mixer and the motor unit, as well as a secondary transmission casing made up of parts (31) and (32), inside of which the transmission mechanisms and two detachable stirring hoops are incorporated. 10 15

7. Improved food mixing and grinding machine, in accordance with the previous claims, characterised because the mixer has a male coupling sleeve which transmits to the axle of the secondary transmission joined by means of a pin, and the latter by means of cogs (33) and (34) to the stirring axles (35) and (35'), the stirring hoops being joined to the stirring axles rotating together, the secondary transmission axle (37) moving supported by bearings (38) and the stirring axles (35) and (35') by sintered bushes (39) and (39'). 20 25

8. Improved food mixing and grinding machine, in accordance with the previous claims, characterised because the interior of the mixer arm is watertight and detachable. 30

9. Improved food mixing and grinding machine, in accordance with the previous claims, characterised because the connection between the stirring hoops and the stirring axles is made by means of a "positioner" (40) having a spring and spherical piece, which is introduced into the groove incorporated in the stirring axle. 35 40

10. Improved food mixing and grinding machine, in accordance with the previous claims, characterised because the stirring hoop is made up of two hoop bars, riveted on the lower end, and on the upper end joined to the outer casing or bush (43), as well as on the bar casing (44), the stirring hoops being detachable. 45 50

55

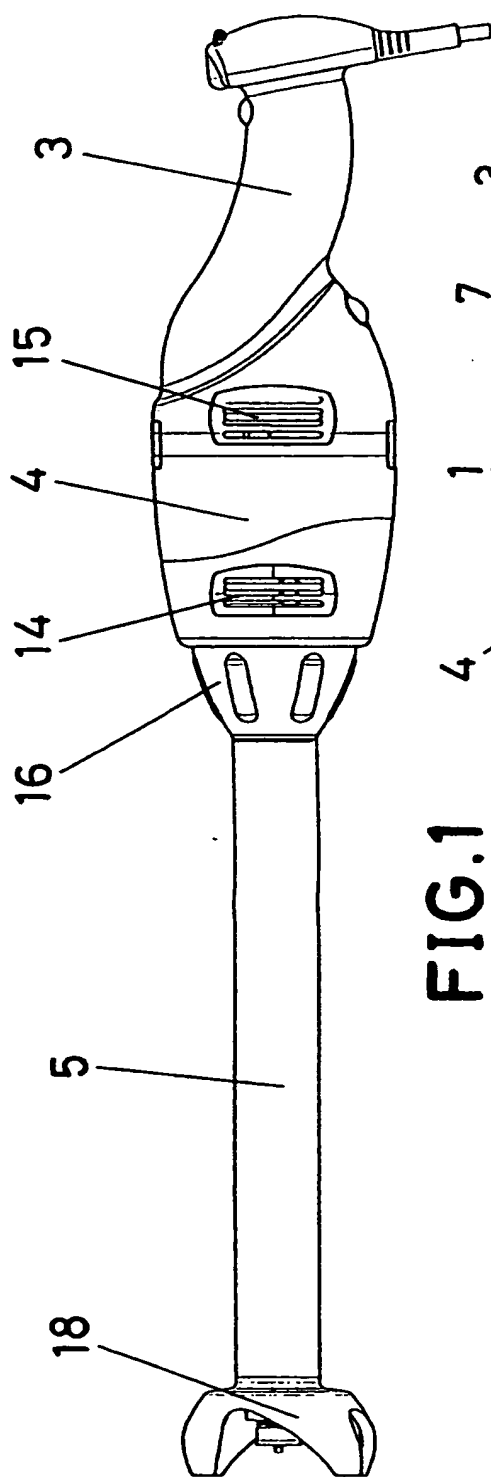


FIG.1

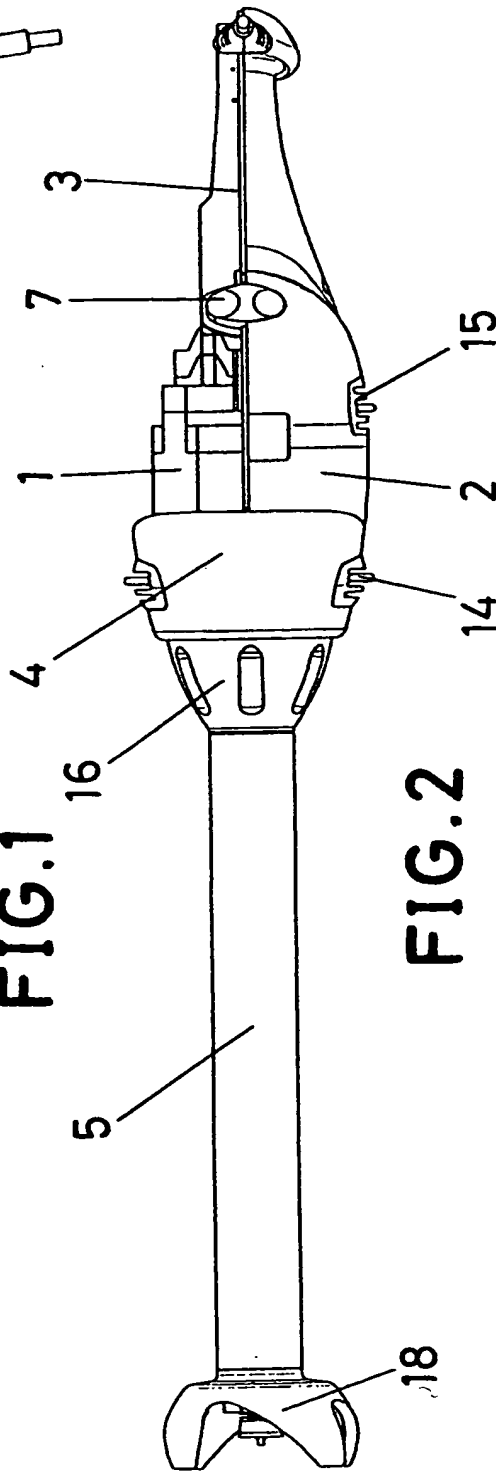
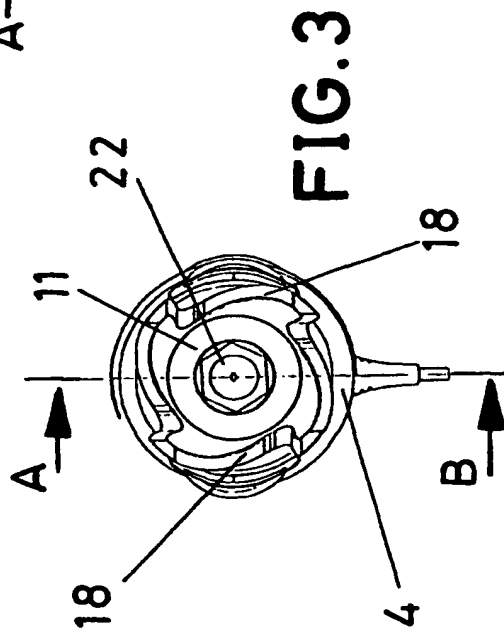
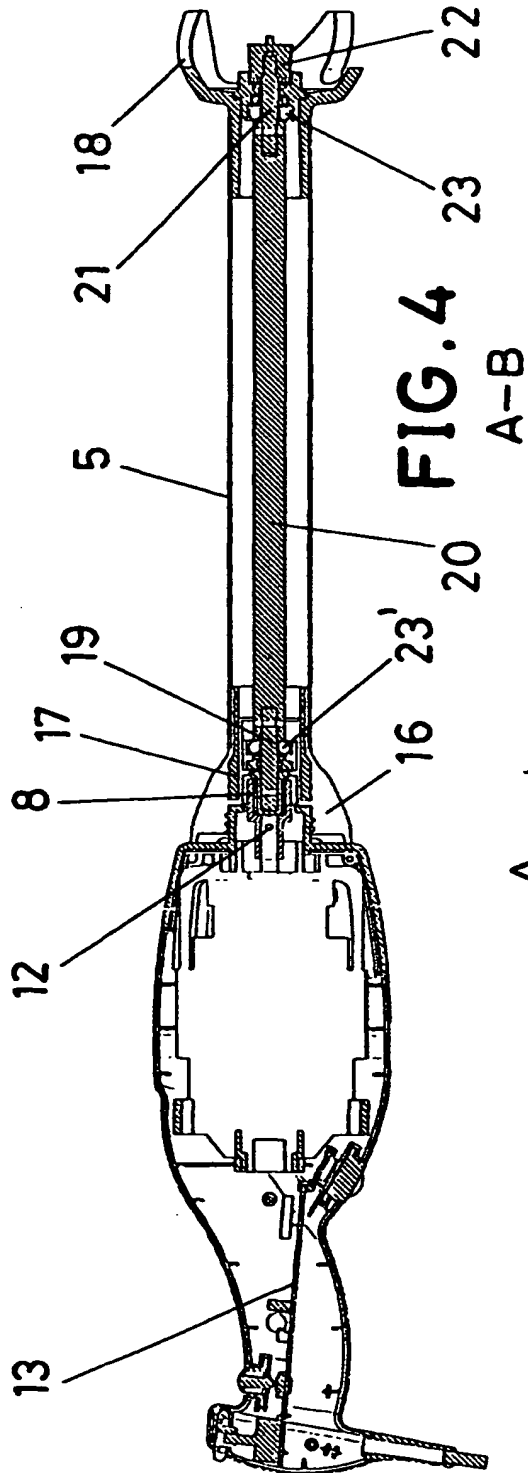
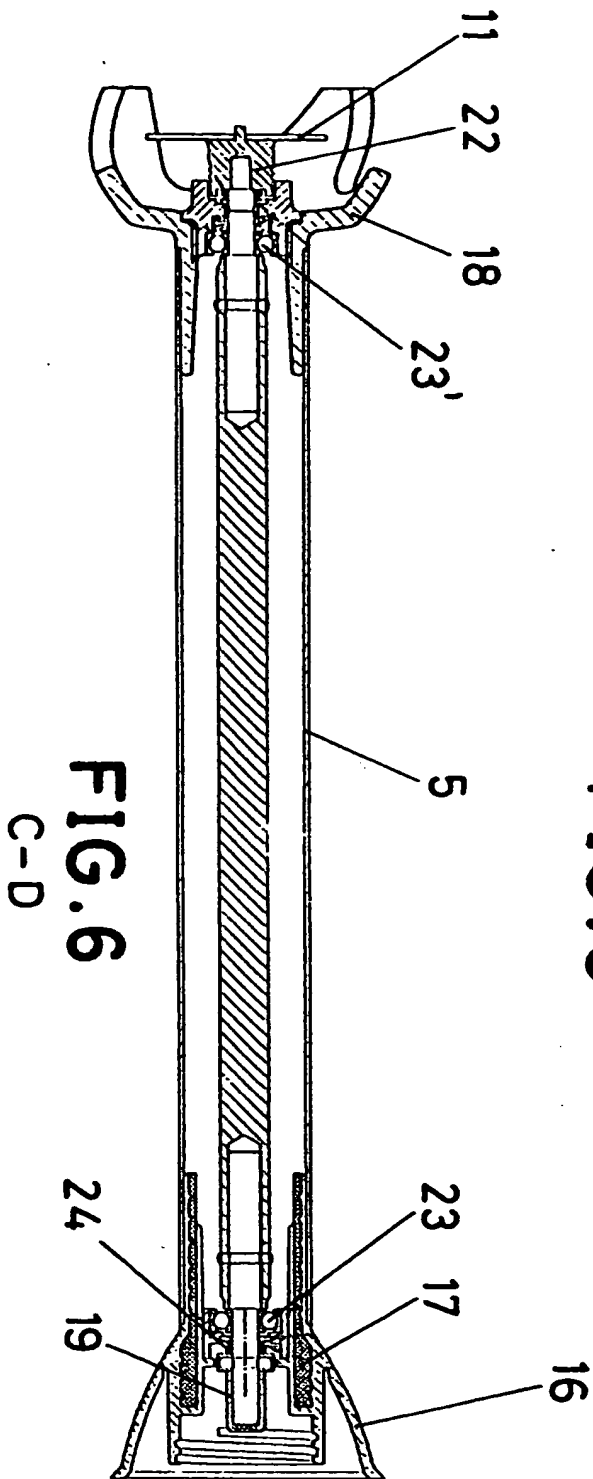
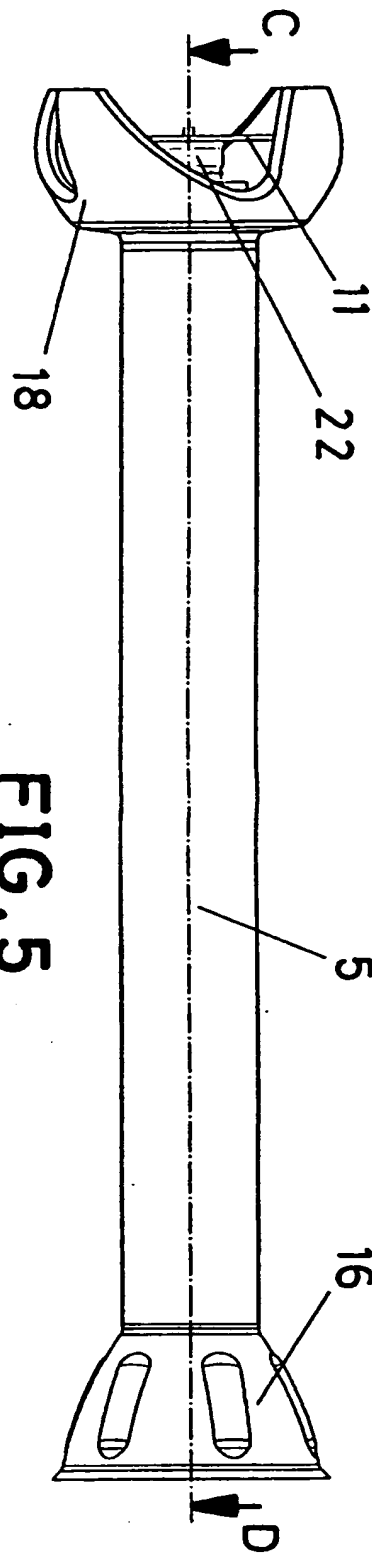
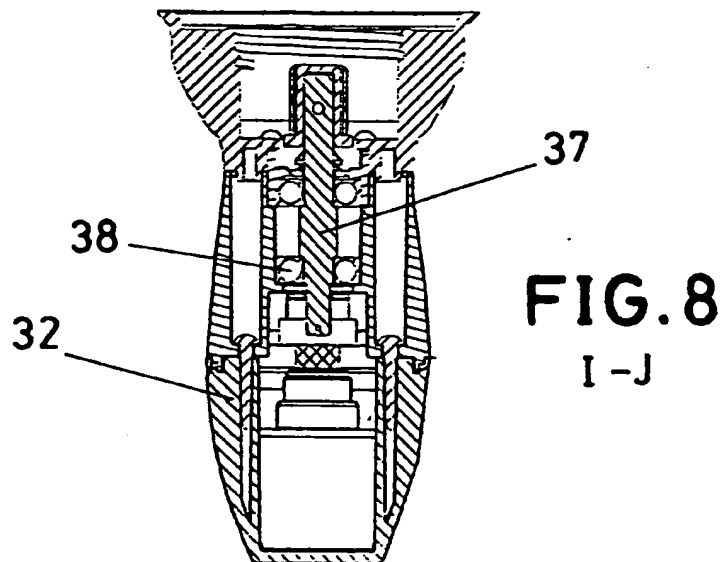
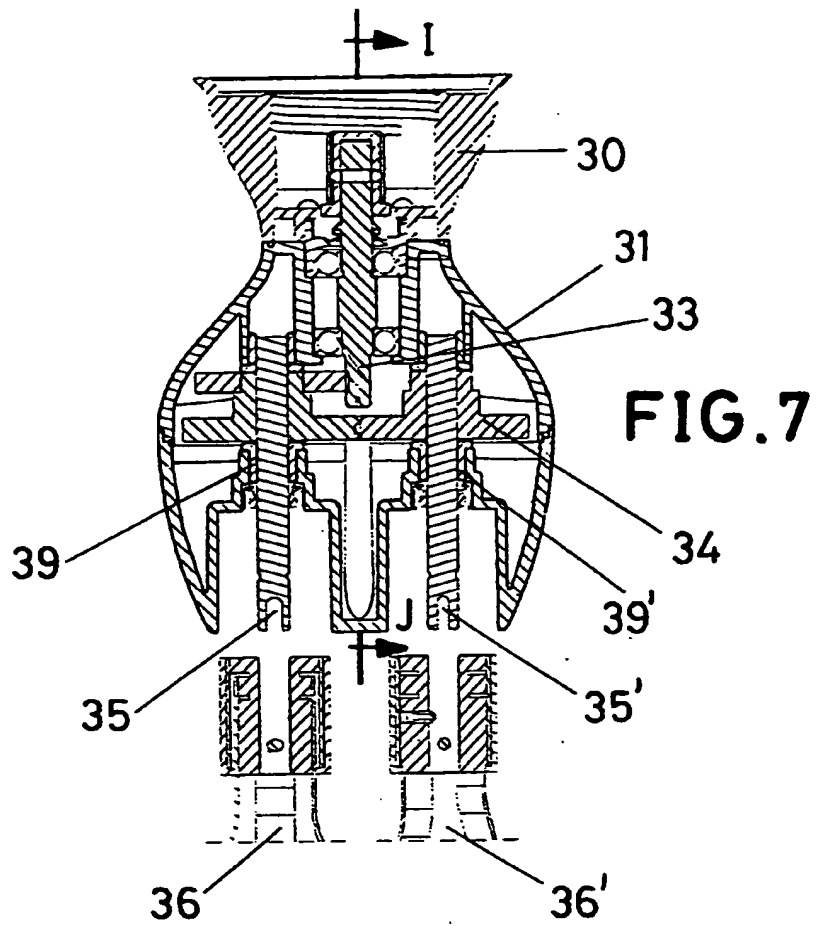


FIG.2








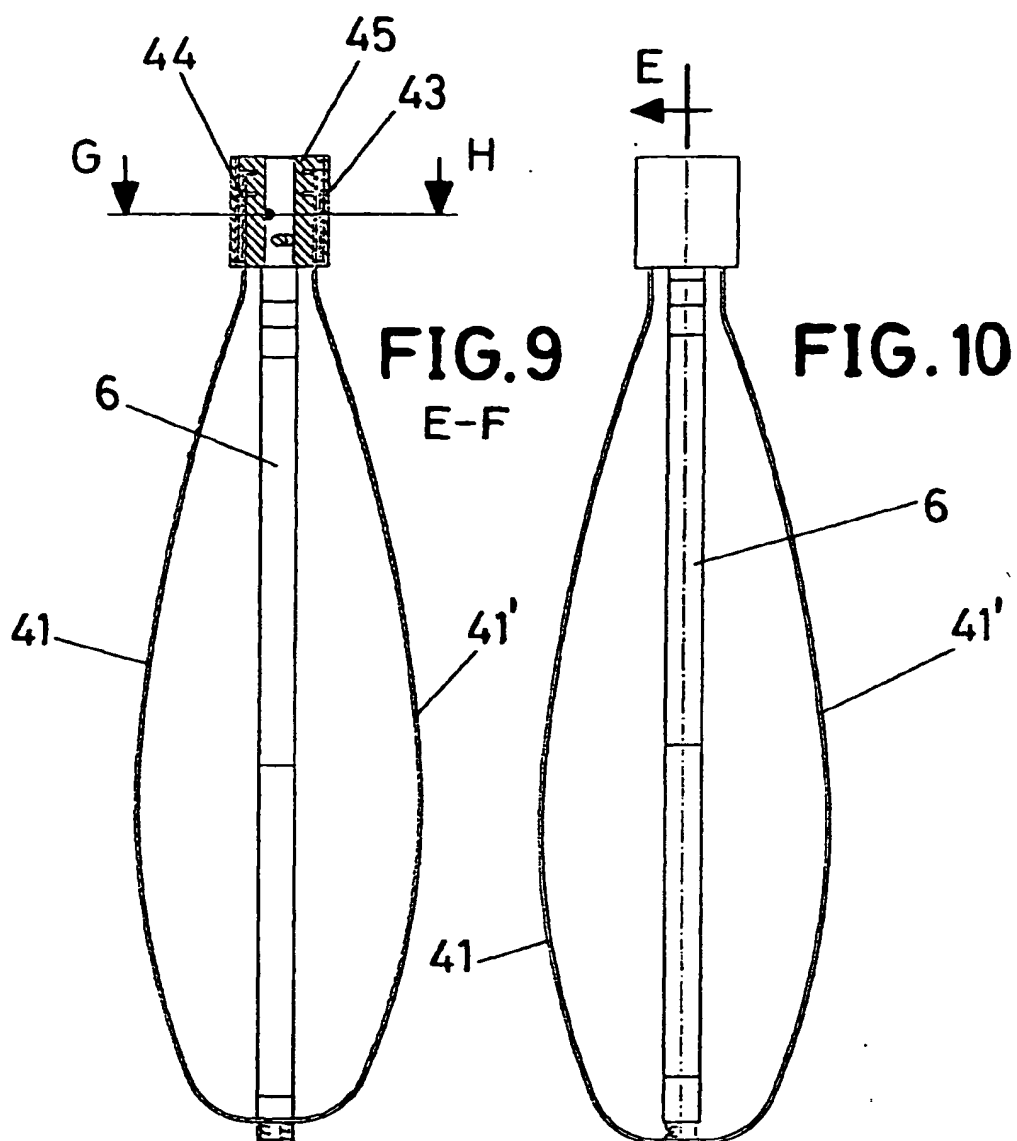


FIG. 11
G-H

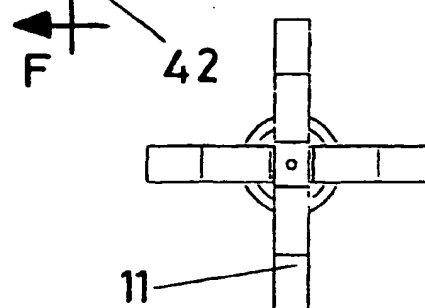


FIG. 12